
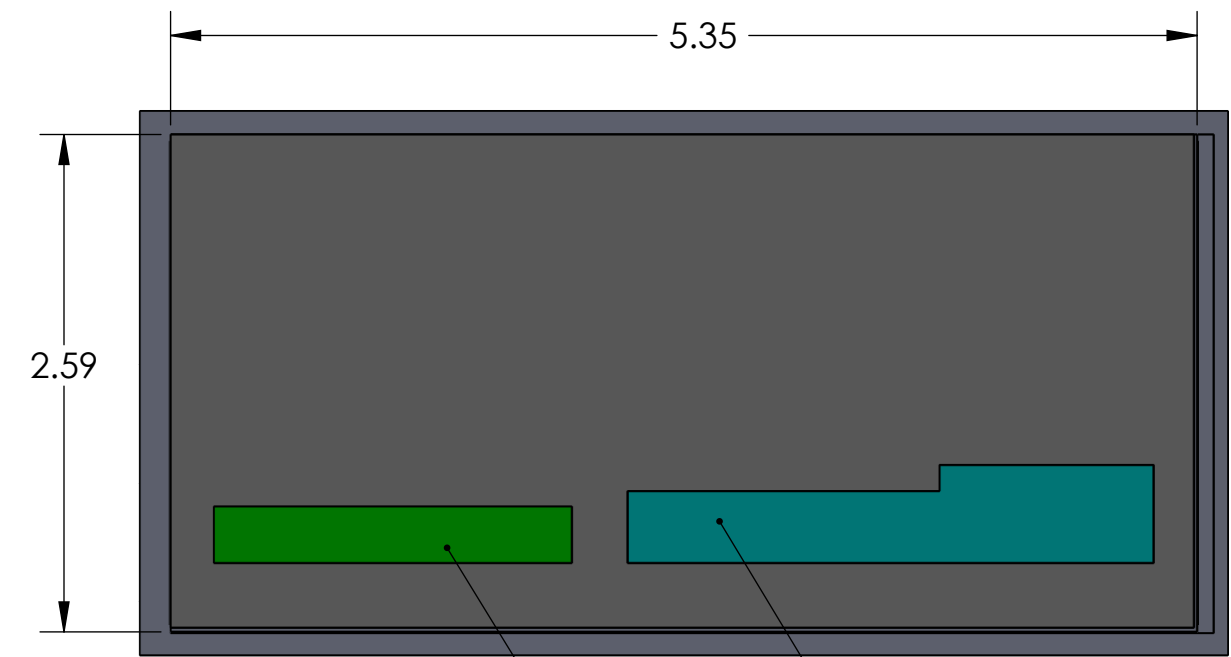
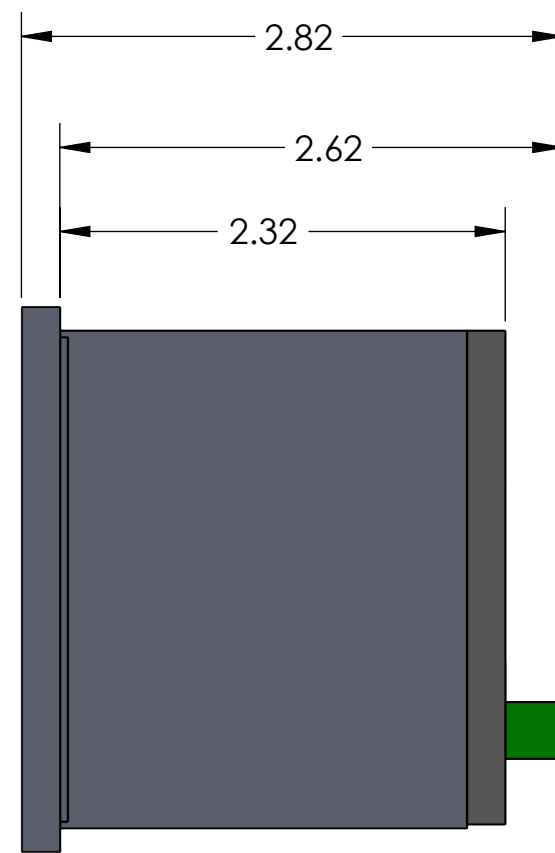
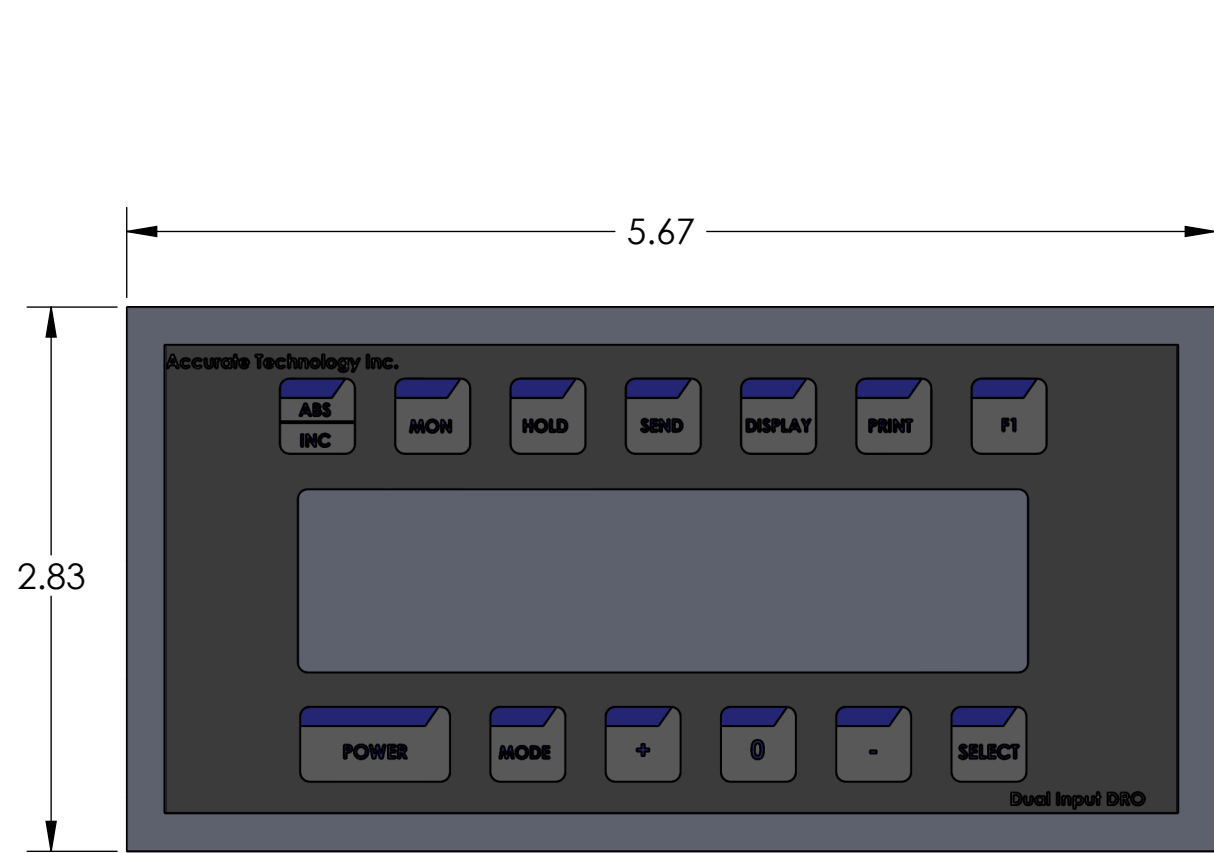


SPRING CLIPS ARE SUPPLIED TO KEEP READOUT INSTALLED INTO PANEL

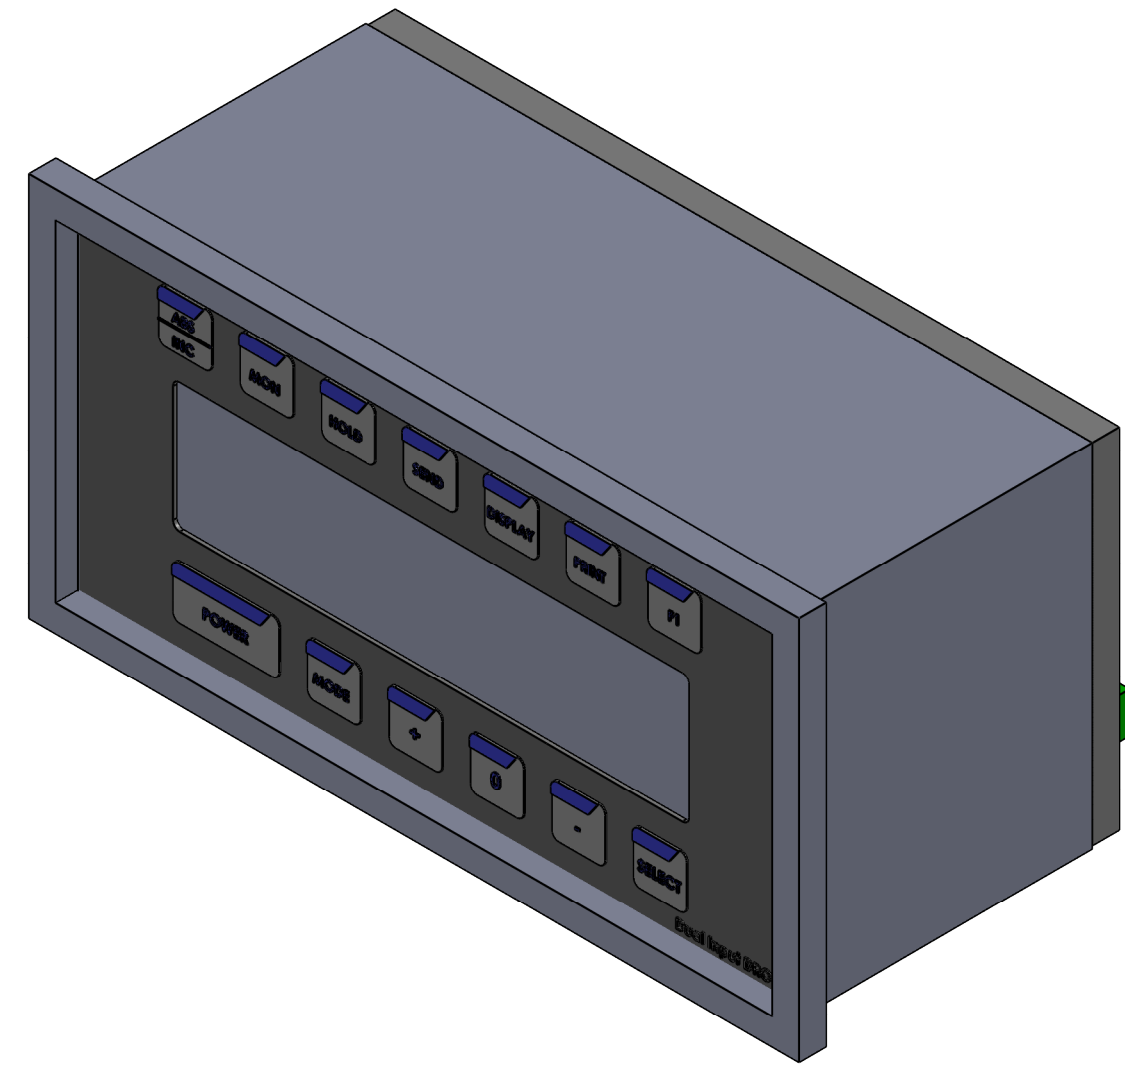

INPUTS FROM ENCODERS AND SPC OUTPUTS

POWER, RS232 I/O, AND LIMIT-RELAY CONNECTIONS ON TERMINAL STRIP

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACCURATE TECHNOLOGY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACCURATE TECHNOLOGY, INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ±1 BEND ±2 ONE PLACE DECIMAL ±0.050 TWO PLACE DECIMAL ±0.020 THREE PLACE DECIMAL ±0.005	DRAWN MF	DATE 7/10/2008	NAME MF	DATE 7/10/2008	ACCURATE TECHNOLOGY INC
INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL ASST FINISH -	CHECKED	ENG APPR.	MFG APPR.	Q.A.	COMMENTS:
DO NOT SCALE DRAWING				TITLE: DUAL READOUT	SIZE DWG. NO. REV C 700-1600-500 A
			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1